

CEAG Products  
Explosion protected luminaires

CROUSE-HINDS  
SERIES



## RLF LED A 600 (N) / 1200 (N)

Explosion-protected LED-recessed ceiling luminaire for Zone 1, 2, 21 and 22



**EATON**

*Powering Business Worldwide*

# Explosion-protected recessed ceiling LED-light fittings in compact metal design

RLF LED A 600, RLF LED A 1200 and self-contained emergency luminaire RLF LED A 600 N, RLF LED A 1200 N (Zone 1, 2, 21, 22)

## The explosion-protected lighting concept for recessed ceiling light fittings.

The new Ex recessed-ceiling light fittings RLF ..LED A are especially used for spraying cabinets and paint shops for installation in ceilings where smooth and flush surfaces are important. The glass pane, which is installed with a metal hinge, allows the use of cleaning solvents, if necessary, in order to remove easily spray mist and paintbrushes. Similar requirements are also encountered in the pharmaceutical and chemical industries as well as in technology labs, where simple cleaning and smooth design are essential.

## Designed for easy installation

The housing comprises white-painted steel sheet with an optional cover frame for ceiling mounting. In addition, it can also be fixed by means of two M8 drilled holes on the top of the housing. For an external PE-connection two screw terminals up to 6 mm<sup>2</sup> are available.



The hinged, frameless pane made of 5 mm thick safety glass is fixed with 2 resp. 3 captive screws and has inside hinges. The EPDM sealing ensures the high degree of protection IP65.

## Long-term safety

Thanks to its large input voltage range the electronic driver (110- 254 A AC / 220- 250 V DC) can be used internationally. Due to the low self-heating, ambient temperatures up to +60 °C are possible.

## Versatile light

Depending on the application, three luminous flux versions are available in efficient LED technology (2500/5000/10000 lm) in various sizes. Through their variety even demanding lighting tasks can be faced. In addition, the light colour 6000K ensures an illumination similar to daylight, which is a high priority, for example, in paint shops.

## Easy to install

The double-sided through-wiring in combination with the generous connecting space provides a cost-saving installation.



Using optional mounting brackets the luminaires can be installed adjustable on walls or ceilings

## If you need a reliable and decentralised emergency lighting

The self-contained emergency light fitting RLF LED A... N ensures decentralised emergency lighting, independent of central systems. These luminaires offers in particular significant cost advantages, particularly in large-scale installations.






















The self-contained emergency light fitting with integrated battery allows an autonomous emergency lighting with 1.5 h or 3 h rated operating time.



## Features

- Universal electronic driver for 110 - 254 V AC / 220 - 250 V DC
- Various lumen packages up to 13447 lm in different sizes available
- Suitable for high ambient temperatures up to +60 °C
- Flush installation, especially for spraying cabinets and paint shops with optional mounting bracket
- Toughened safety glass
- With self-contained battery unit (RLF 250 LED...N)
- Suitable for B15 fire resistance ceilings

## Ordering details

Type	Content	Luminous flux	Emergency lighting duration	Cable gland/ thread	Screw plugs	Order No.
<b>RLF LED A 600</b>						
	RLF LED A 600 3L	2/5-2K	3373 lm	1 x M25, Plastic cable gland	1 x M25	<b>1 2286 111 103</b>
	RLF LED A 600 3L	2/5-2M <sup>1)</sup>	3373 lm	2 x M20, Metal thread	1 x M20	<b>1 2286 111 111</b>
	RLF LED A 600 7L	2/5-2K	6664 lm	1 x M25, Plastic cable gland	1 x M25	<b>1 2286 141 103</b>
	RLF LED A 600 7L	2/5-2M <sup>1)</sup>	6664 lm	2 x M20, Metal thread	1 x M20	<b>1 2286 141 111</b>
<b>RLF LED A 1200</b>						
	RLF LED A 1200 7L	2/5-2K	6742 lm	1 x M25, Plastic cable gland	1 x M25	<b>1 2286 241 103</b>
	RLF LED A 1200 7L	2/5-2M <sup>1)</sup>	6742 lm	2 x M20, Metal thread	1 x M20	<b>1 2286 241 111</b>
	RLF LED A 1200 13L	2/5-2K	13447 lm	1 x M20, Plastic cable gland	1 x M25	<b>1 2286 271 103</b>
	RLF LED A 1200 13L	2/5-2M <sup>1)</sup>	13447 lm	2 x M20, Metal thread	1 x M20	<b>1 2286 271 111</b>
<b>RLF LED A 600 N (self-contained emergency light fitting)</b>						
	RLF LED A 600 N 3L	2/4-2K	3373 lm	1.5 h	1 x M25, plastic cable gland	1 x M25 <b>1 2288 111 103</b>
	RLF LED A 600 N 3L	2/5-2M <sup>1)</sup>	3373 lm	1.5 h	2 x M20, Metal thread	1 x M20 <b>1 2288 111 111</b>
	RLF LED A 600 N 3L	2/5-2K	3373 lm	3 h	1 x M25, Plastic cable gland	1 x M25 <b>1 2289 111 103</b>
	RLF LED A 600 N 3L	2/5-2M <sup>1)</sup>	3373 lm	3 h	2 x M20, Metal thread	1 x M20 <b>1 2289 111 111</b>
	RLF LED A 600 N 7L	2/5-2K	6664 lm	1.5 h	1 x M25, Plastic cable gland	1 x M25 <b>1 2288 141 103</b>
	RLF LED A 600 N 7L	2/5-2M <sup>1)</sup>	6664 lm	1.5 h	2 x M20, Metal thread	1 x M20 <b>1 2288 141 111</b>
	RLF LED A 600 N 7L	2/5-2K	6664 lm	3 h	1 x M25, Plastic cable gland	1 x M25 <b>1 2289 141 103</b>
	RLF LED A 600 N 7L	2/5-2M <sup>1)</sup>	6664 lm	3 h	2 x M20, Metal thread	1 x M20 <b>1 2289 141 111</b>
<b>RLF LED A 1200 N (self-contained emergency light fitting)</b>						
	RLF LED A 1200 N 7L	2/5-2K	6742 lm	1.5 h	1 x M25, Plastic cable gland	1 x M25 <b>1 2288 241 103</b>
	RLF LED A 1200 N 7L	2/5-2M <sup>1)</sup>	6742 lm	1.5 h	2 x M20, Metal thread	1 x M20 <b>1 2288 241 111</b>
	RLF LED A 1200 N 7L	2/5-2K	6742 lm	3 h	1 x M25, Plastic cable gland	1 x M25 <b>1 2289 241 103</b>
	RLF LED A 1200 N 7L	2/5-2M <sup>1)</sup>	6742 lm	3 h	2 x M20, Metal thread	1 x M20 <b>1 2289 241 111</b>
	RLF LED A 1200 N 10L	2/5-2K	13447 lm	1.5 h	1 x M25, Plastic cable gland	1 x M25 <b>1 2288 271 103</b>
	RLF LED A 1200 N 13L	2/5-2M <sup>1)</sup>	13447 lm	1.5 h	2 x M20, Metal thread	1 x M20 <b>1 2288 271 111</b>
	RLF LED A 1200 N 13L	2/5-2K	13447 lm	3 h	1 x M25, Plastic cable gland	1 x M25 <b>1 2289 271 103</b>
	RLF LED A 1200 N 13L	2/5-2M <sup>1)</sup>	13447 lm	3 h	2 x M20, Metal thread	1 x M20 <b>1 2289 271 111</b>

Scope of delivery with LED and without fixing accessories  
Metal cable glands see catalogue part 2: 2.3.12 ff

# Accessories / Polar curve / Dimension drawing


RLF LED A (N)

## Accessories





Type	Application	Order No.
Mounting frame for ceiling mounting	for RLF LED A 600 / 600 N 3L	<b>3 2283 000 001</b>
Mounting frame for ceiling mounting	for RLF LED A 600 / 600 N 7L	<b>3 2283 000 002</b>
Mounting frame for ceiling mounting	for RLF LED A 1200 / 1200 N 3L	<b>3 2283 000 003</b>
Mounting frame for ceiling mounting	for RLF LED A 1200 / 1200 N 13L	<b>3 2283 000 004</b>
Set of wall bracket adjustable (2 pcs.)	for RLF LED A....	<b>3 2283 000 007</b>


## Polar curve RLF... LED A

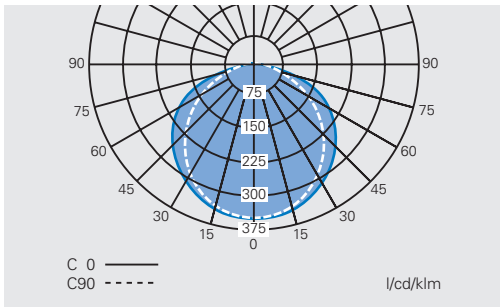


## RLF LED A 600 / 1200..(N)

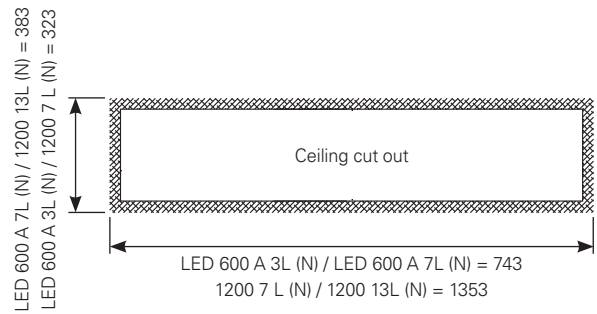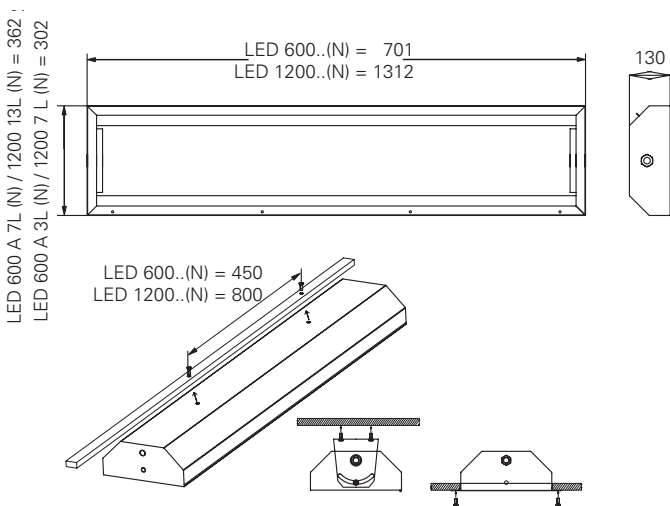

## Mounting frame RLF LED A 600 / 1200..(N)

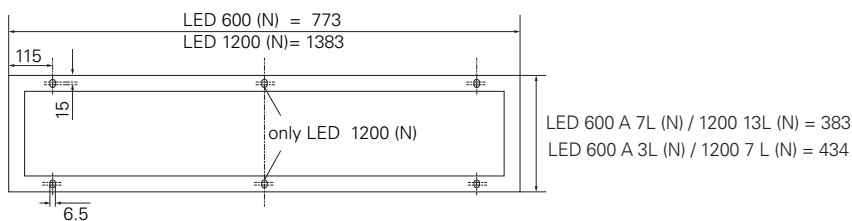

Dimensions in mm

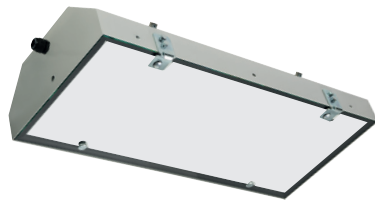

## Technical data

	RLF LED A 600 3L / 7L	RLF LED A 1200 7L / 13L
EU-Type Examination Certificate	FTZÚ 17 ATEX 0002X	FTZÚ 17 ATEX 0002X
Marking accd. to 2014/34/EU	Ⓔ II 2 G Ex eb mb op is IIC T4 Gb Ⓔ II 2 D Ex tb IIIC T67°C Db	Ⓔ II 2 G Ex eb mb op is IIC T4 Gb Ⓔ II 2 D Ex tb IIIC T67°C Db
Permissible ambient temperature	-20 °C up to +60 °C	-20 °C up to +55 °C
Rated voltage	110- 254 V AC / 220- 250 V DC	110- 254 V AC / 220- 250 V DC
Rated current	0.13 A / 0.26 A at 230 V	0.24 A / 0.48 A at 230 V
Frequency	50- 60 Hz	50- 60 Hz
Power factor cos φ	≥ 0.95	≥ 0.95
Circuit	electronic LED-driver	electronic LED-driver
Protection class	I	I
Lamp / Illuminant	LED module 1 x 25 W / 2 x 25 W	LED module 1 x 50 W / 2 x 50 W
Rated luminous flux of the luminaire	3373 lm (3L) / 6664 lm (7L)	6742 lm (7L) / 13447 lm (13L)
Light colour/ CRI	6000 K / R <sub>a</sub> >80 <sup>2)</sup>	6000 K / R <sub>a</sub> >80 <sup>2)</sup>
Dimensions (L x W x H)	701 x 302 x 130 mm / 701 x 362 x 130 mm	1312 x 302 x 130 mm / 1312 x 362 x 130 mm
Connecting terminals	L1, L2, L3, N, PE; max. 2 x 2.5 mm <sup>2</sup> twin-ended through-wiring	L1, L2, L3, N, PE; max. 2 x 2.5 mm <sup>2</sup> twin-ended through-wiring
Enclosure colour	white RAL 9010	white RAL 9010
Enclosure material	painted steel sheet <sup>3)</sup>	painted steel sheet <sup>3)</sup>
Weight	9.5 kg (3L) / 11.9 kg (7L)	15.6 kg (7L)/ 18.4 kg (13L)
Cable glands / gland plates / enclosure drilling	Ex-e cable glands M25 x 1.5 (plastic), option: M20 x 1.5 metal thread <sup>1)</sup>	Ex-e cable glands M25 x 1.5 (plastic), option: M20 x 1.5 metal thread <sup>1)</sup>
Degree of protection accd. to EN 60529	IP65	IP65
Protective cover / protective bowl	single-safety glass pane of 5 mm thick	single-safety glass pane of 5 mm thick


1) with dustcover if entry/thread is not closed

2) 4000 K on request

3) polished stainless steel 304 (1.4301 (Inox) on request

# Technical Data

RLF LED 600 N / RLF LED 1200 N

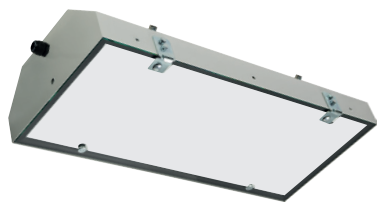

## Technical data

	RLF LED 600 N 3L / 7L	RLF LED 1200 N 7L / 13L
EU-Type Examination Certificate	FTZÚ 17 ATEX 0002X	FTZÚ 17 ATEX 0002X
Marking accd. to 2014/34/EU	⊕ II 2 G Ex eb mb op is IICT4 Gb ⊕ II 2 D Ex tb IICT67°C Db	⊕ II 2 G Ex eb mb op is IICT4 Gb ⊕ II 2 D Ex tb IICT67°C Db
Permissible ambient temperature	0 °C up to +40 °C	0 °C up to +35 °C
Rated voltage	110- 254 V AC / 220- 250 V DC	110- 254 V AC / 220- 250 V DC
Rated current	0.14 A / 0.26 A at 230 V	0.25 A / 0.49 A at 230 V
Frequency	50- 60 Hz	50- 60 Hz
Power factor cos φ	≥ 0.95	≥ 0.95
Circuit	electronic LED-driver	electronic LED-driver
Protection class	I	I
Lamp / Illuminant	LED module 1 x 30 W / 2 x 30 W	LED module 1 x 50 W / 2 x 50 W
Rated luminous flux of the luminaire	3373 lm (3L) / 6664 lm (7L)	6742 lm (7L) / 13447 lm (13L)
Light colour/ CRI	6000 K / R <sub>a</sub> >80 <sup>2)</sup>	6000 K / R <sub>a</sub> >80 <sup>2)</sup>
luminous flux in emergency mode 1.5 h, one LED module 3 h, one LED module	RLF LED A 600 N 1.5h 3L – 515lm RLF LED A 600 N 3.0h 3L – 383lm  RLF LED A 600 N 1.5h 7L- 746lm RLF LED A 600 N 3.0h 7L- 406lm	RLF LED A 1200 N 1.5h 7L – 829lm RLF LED A 1200 N 3.0h 7L- 447lm  RLF LED A 1200 N 1.5h 13L – 829lm RLF LED A 1200 N 3.0h 13L – 455lm
Emergency lighting duration	1.5 h or 3 h	1.5 h or 3 h
Dimensions (L xW x H)	701 x 302 x 130 mm / 701 x 362 x 130 mm	1312 x 302 x 130 mm / 1312 x 362 x 130 mm
Connecting terminals	L, L1,L2, L3, N, PE; max. 2 x 2.5 mm <sup>2</sup> twin-ended through-wiring	L, L1,L2, L3, N, PE; max. 2 x 2.5 mm <sup>2</sup> twin-ended through-wiring
Enclosure colour	white RAL 9010	white RAL 9010
Enclosure material	painted steel sheet <sup>3)</sup>	painted steel sheet <sup>3)</sup>
Weight	11.50 kg 3L (1.5h)/ 12.10 kg 7L (3h) 13.60 kg 7L (1.5h)/ 14.80 kg 13L (3h)	16.40 kg 7L (1.5h)/ 18.40 kg 7L (3h) 18.50 kg 13L (1.5h)/ 19.10 kg 13L (3h)
Cable glands / gland plates / enclosure drilling	Ex-e cable glands M25 x 1.5 (plastic) , option: M20 x 1.5 metal thread <sup>1)</sup>	Ex-e cable glands M25 x 1.5 (plastic) , option: M20 x 1.5 metal thread <sup>1)</sup>
Degree of protection accd. to EN 60529	IP65	IP65
Protective cover / protective bowl	single-safety glass pane of 5 mm thick	single-safety glass pane of 5 mm thick

1) with dustcover if entry/thread is not closed

2) 4000 K on request

3) polished stainless steel 304 (1.4301 (Inox) on request



# Eaton's Crouse-Hinds Business

## The safety you rely on.

See the complete offering of Hazardous and Industrial Products at [www.crouse-hinds.de](http://www.crouse-hinds.de).

### U.S. (Global Headquarters): Eaton's Crouse-Hinds Business

1201 Wolf Street  
Syracuse, NY 13208

(866) 764-5454  
FAX: (315) 477-5179  
FAX Orders Only:  
(866) 653-0640

[CrouseCustomerCTR@Eaton.com](mailto:CrouseCustomerCTR@Eaton.com)

#### For more information:

If further assistance is required, please contact an authorized Eaton Distributor, Sales Office, or Customer Service Department.

### Australia

Phone +61-2-8787-2777  
Fax +61-2-9609-2342  
[crousehindsanz@eaton.com](mailto:crousehindsanz@eaton.com)

### China

Phone +86-21-2899-3600  
Fax +86-21-2899-4055  
[ECHsales@eaton.com](mailto:ECHsales@eaton.com)

### Great Britain

Phone +44-247-630-89 30  
Fax +44-247-630-10 27  
[sales5@eaton.com](mailto:sales5@eaton.com)

### India

Phone +91-124-4683888  
Fax +91-124-4683899  
[cchindia@eaton.com](mailto:cchindia@eaton.com)

### Canada

Toll Free +1-800-265-0502  
Fax +1-800-263-9504  
Fax orders only:  
+1-866-653-0645

### Korea

Phone +82-2-3484-6783  
Fax +82-2-3484-6778  
CCHK-sales@  
[cooperindustries.com](mailto:cooperindustries.com)

### Mexico/Latin America/ Caribbean

Phone +52-555-804-4000  
Fax +52-555-804-4020  
[mxmercadotecnica@cooperindustries.com](mailto:mxmercadotecnica@cooperindustries.com)

### Spain

Phone +34-9-37362710  
Fax +34-9-37835055  
[sales.CCH.es@cooperindustries.com](mailto:sales.CCH.es@cooperindustries.com)

### Middle East (Dubai)

Phone +971-4-427-2522 / 2500  
Fax +971-4-429-8521  
[CHMEsales@Eaton.com](mailto:CHMEsales@Eaton.com)

### The Netherlands

Phone +31-10-2452145  
Fax +31-10-2452121  
[CHRD\\_mail@Eaton.com](mailto:CHRD_mail@Eaton.com)

### Norway

Phone +47-32-244600  
Fax +47-32-244646  
[CHLloffice@eaton.com](mailto:CHLloffice@eaton.com)

### Singapore:

Phone +65-6645-9888  
Fax +65-6297-4819  
[CHSI-Sales@Eaton.com](mailto:CHSI-Sales@Eaton.com)

### Turkey

Phone +90-216-464-20-20  
Fax +90-216-464-20-10  
[infoEGTurkey@eaton.com](mailto:infoEGTurkey@eaton.com)

### Russia

Phone +7-495 510-24-27  
Fax +7-495 510-24-28  
[info@cooper.ru.com](mailto:info@cooper.ru.com)  
[www.cooper-russia.ru](http://www.cooper-russia.ru)

### Eaton

Neuer Weg – Nord 49  
D-69412 Eberbach

Phone +49 (0) 6271/806-500  
Fax +49 (0) 6271/806-476  
E-mail [info-ex@eaton.com](mailto:info-ex@eaton.com)  
Internet [www.crouse-hinds.de](http://www.crouse-hinds.de)

### Eaton

1000 Eaton Boulevard  
Cleveland, OH 44122  
United States  
[Eaton.com](http://Eaton.com)

© 2024 Eaton Corporation  
All Rights Reserved  
Printed in Germany  
Publication No. BR 300 8000 2286  
October 2024

Changes to the products, to the information contained in this document, and to prices are reserved; so are errors and omissions. Only order confirmations and technical documentation by Eaton is binding. Photos and pictures also do not warrant a specific layout or functionality. Their use in whatever form is subject to prior approval by Eaton. The same applies to Trademarks (especially Eaton, Moeller, and Cutler-Hammer). The Terms and Conditions of Eaton apply, as referenced on Eaton Internet pages and Eaton order confirmations.

### Eaton's Crouse-Hinds Business

1201 Wolf Street  
Syracuse, NY 13208  
(866) 764-5454  
[CrouseCustomerCTR@Eaton.com](mailto:CrouseCustomerCTR@Eaton.com)

Eaton is a registered trademark.

All other trademarks are property of their respective owners.



Powering Business Worldwide